



Heavy-duty
forklifts designed
for longevity

8.0-10 TONS

Diesel /Gasoline/LPG Forklift
柴油/汽油/LPG叉车

·Stage V ·EPA 4

Forklifts are special safety equipment, and each component of the vehicle is a safety component. The safety valve in the oil cylinder will ensure the safe use of the vehicle.



Features




Fork positioner & Side shifter

a hydraulic attachment that moves the tines (forks) together or apart. This removes the need for the operator to manually adjust the tines for different-sized loads.




Combination display

LED Display offers useful information, such as the fuel meter, water temperature indicator and hour meters the convenience of operator.

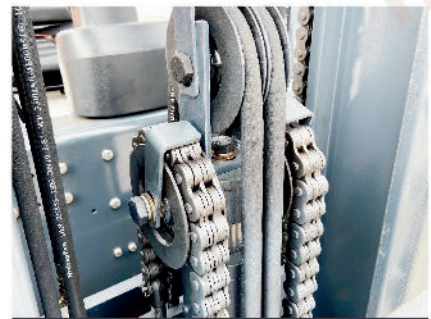

Wide view mast

Strong U-steel, lifting cylinder, chain, bearing, and is equipped with a safety valve, when the oil cylinder or oil pipe breaks, the mast will not fall down instantly, will slowly decline.

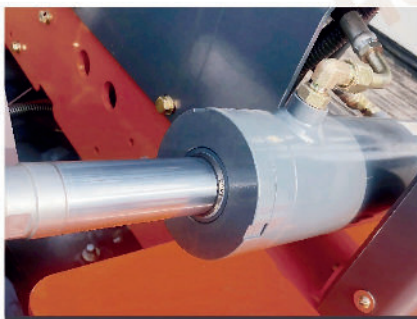


Reliable component

SHIMADZU pump and valve, EATON oil pipe ensure precise control and durable lifetime, never leak oil



Comfortable seat

The new suspension adjustable seats make long-term operation more comfortable and the safety of the driver is guaranteed with seat belts.

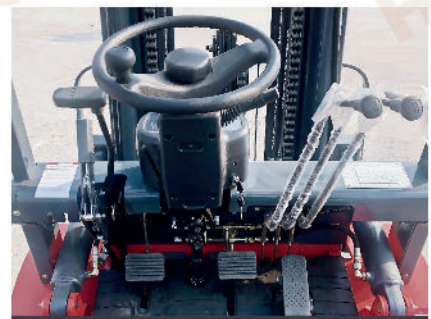

Ergonomics

Roomy foot space of 1.06 meters wide enables a comfort operation. Hydraulic controls are located besides display for maximum operator comfort, while allowing easy Left-side entry and exit.

The publicized pictures, specification and parameter is offered to refer, please see according to the real goods

注：本宣传册图片 规格参数仅供参考 以实物为准。



Heavy-duty
forklifts designed
for longevity.

México Office

Av. Jorge Jiménez Cantú S/N, Plaza
Antigua 1, edif. 4-B, piso 2,
oficina 201, Col. Hacienda de Valle
Escondido, Zona Esmeralda,
Atizapán de Zaragoza,
Edo. de Méx., C.P. 52937
Whatsapp 55 2094 9972

China Office

Room 423, Fuhua Plaza,
25 Fuhua East Road,
Panyu District, Guangzhou City,
Guangdong Province,
China Zip Code 511403
Phone +8618529273426
info@cvg-forklifts.com



8.0-10 TONS



Heavy-duty
forklifts designed
for longevity

HUAYA CARRY THE FUTURE
胜出，必有所长


Machine 2D Graph

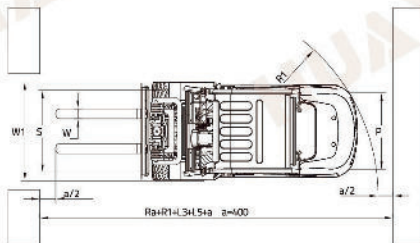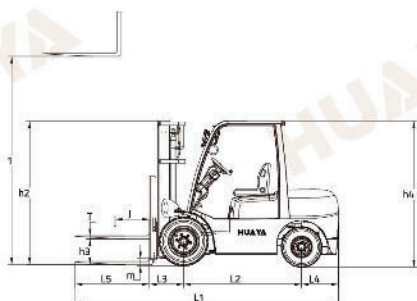


Diesel /Gasoline/LPG Forklift

柴油/汽油/LPG叉车

Capacity Chart

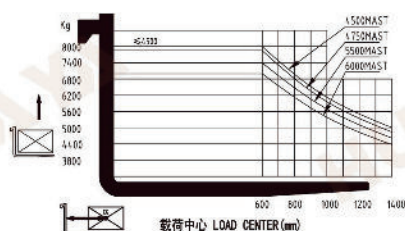

8.0T载荷曲线图
8.0T load curve

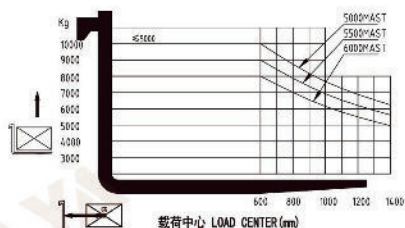


10T载荷曲线图
10T load curve

Machine Parameters

特征 Characteristics		CPC80	CPC100	
Power 动力	-	Diesel	Diesel	optional
Rated Capacity 额定荷载	kg	8000	10000	/
Load Center 载荷中心	J(mm)	600	600	/
Max. Lifting Height 提升高度	H1(mm)	3000	3000	optional
Free Lifting Height 自由提升高度	H3(mm)	150	150	optional
Fork Size L×W×H 货叉尺寸	L5×W×H(mm)	1220×150×70	1220×150×80	optional
Mast Tilting Angle Forward/Backward 门架倾角	°	6/12	6/12	/
Min. Turning Radius 最小转弯半径	R1(mm)	3580	3850	/
Min. Ground Clearance(mast) 最小离地间隙	Ra(mm)	200	200	/
Overhead Guard Height 护顶架高度	H4(mm)	2450	2500	optional
性能 Performance				
Max. Traveling Speed(loaded) 最大行驶速度	km/h	26/29	26/29	/
Max. Lifting Speed(loaded/unloaded) 最大起升速度	mm/s	460/500	460/500	/
Max. Traction/Gradeability(loaded) 最大牵引力/爬坡能力	KN/°	53	53	/
Min. Right Angle Stacking Aisle Width 最小直角通道宽度	mm	3240	3440	/
尺寸 Dimensions				
Overall Length(without fork) 全长	L1(mm)	3780	4020	/
Overall Width 全宽	W1(mm)	1995	2100	/
Mast Lowered Height 门架落地高度	H2(mm)	2625	2625	optional
Mast Extended Height 货叉最大起升时高度(带挡货架)	mm	4420	4420	optional
底盘 Chassis				
Tyre(Front) 前轮胎	-	8.25-15-14PR	8.25-15-14PR	optional
Tyre(Rear) 后轮胎	-	8.25-15-14PR	8.25-15-14PR	optional
Wheelbase 轴距	L2(mm)	2450	2450	/
Tires distance(Front/Rear) 轮距	S(mm)	1470/1700	1470/1700	/
Vehicle weight(Non-load) 自重	kg	9650	12500	/
驱动 Powertrain				
Battery(Voltage/Capacity) 蓄电池	V/Ah	24/160	24/160	/
Engine(Brand) 发动机(品牌)	-	Xichai	Xichai	optional
Engine(Rated power) 发动机(额定功率)	kw/r.p.m	85/2200	85/2200	optional
Engine(Rated torque) 发动机(额定转矩)	Nm/r.p.m	460/1400-1600	460/1400-1600	optional
Engine(Cylinder amount) 发动机(气缸数量)	-	6	6	optional
Engine(Bore×Stroke) 发动机(缸径×冲程)	mm	4-110×124	4-110×124	optional
Engine(Displacement) 发动机(排量)	L	4.75	4.75	/
Fuel Tank Capacity 燃油箱容量	L	160	160	/
Transmission(Front/Rear) 传动档位(前/后)	-	2/2	2/2	optional
Working Pressure 工作压力	Mpa	20	20	/

Remarks:The above parameters are based on 3M duplex standard mast.



MITSUBISHI S4S



YANMAR 4TNE98